



**RENZACCI UK**

**...BE THE BEST!**



**PONY**

# Presses

Finishing presses for the laundry, drycleaning and manufacturing industries.



## SP-U MANUAL UTILITY PRESS

Pony manufacture a wide range of professional finishing presses with a compact design, combining power, functionality and rapidity. Four different lines are produced to allow for all manner of pressing operations. Pony's industry-leading presses are also available with different shaped heads and bucks; both padded (steaming head and steam/vacuum buck; also blowing by request) or with nickel-plated polished head (steaming and vacuum buck). All presses are ready for connection to external steam and vacuum supplies or available with a built-in boiler (9 or 20 litres), compressor and vacuum.

All products shown may vary due to various options available.



CP-U SPECIAL



CP-UP



CP-P



SP-U



BP-UL



BP-B

## AIR-OPERATED PRESSES:

Air operated presses with either two button or pedal operated head closing complete with head safety guard.

- **CPS-COLOX PRESS SPECIAL**

Highly professional, with very fast head movement and extra strong adjustable squeezing pressure.

- **CP-COLOX PRESS**

Professional performances with fast head movement and adjustable squeezing pressure.

- **BP-BRAVA PRESS**

Excellent priced with brilliant performance; adjustable squeezing pressure.

## MANUAL PRESSES:

Manually operated presses with manual control of head squeezing pressure producing excellent results while being very easy to use and maintain.

- **SP-STANDARD PRESS**

### Features:

- A balanced head using special self adjusting springs allowing optimal alignment of head and buck
- On CPS and CP models the head opens to an angle of 60°
- Copious and instant live steam production thanks to pneumatic valves for steam distribution to both the head and buck
- Easy access to the controls with an adjustable pedal for the maximum comfort of the operator (CPS and CP)

### Available extras:

- Built in Boilers with varying powers
- Built in Vacuum
- ALL STEAM or Steam Electric Irons with Separators
- Automatic system of the finishing cycle
- Blowing device on the buck
- Sponging/beating device, non-stop steam, adjustable spacing between head and buck
- Photocell for automatic vacuum start
- Stainless steel arm and steam or steam/air spotting gun
- Steam iron assembly - Anti-gloss plate for padded boards
- Nomex cloth for polished head

(Please note some accessories are model dependant)




Technical data	BP Range	SP Range	CP Range	CPS Range
Required power	230/1 or 400V/3+N-50 Hz*	230/1 or 400V/3+N-50 Hz*	230/1 or 400V/3+N-50 Hz*	230/1 or 400V/3+N-50 Hz*
9 lt boiler heating	10 – 12 kW	10 – 12 kW	10 – 12 kW	10 – 12 kW
20 lt boiler heating	10 – 12 – 15 – 18kW	10 – 12 – 15 – 18kW	10 – 12 – 15 – 18kW	10 – 12 – 15 – 18kW
Pump motor	0.6 kW	0.6 kW	0.6 kW	0.6 kW
Vacuum motor	0.37 kW	0.37 kW	0.37 kW	0.37 kW
Compressor motor	0.75 kW	-	1.1 kW	-
Boiler drain	1/2"	1/2"	1/2"	1/2"
Vacuum exhaust	Ø100 mm	Ø100 mm	Ø100 mm	Ø100 mm
Water feed	13mm internal diameter	13mm internal diameter	13mm internal diameter	13mm internal diameter
Steam inlet	1/2"	1/2"	1/2"	1/2"
Condensation return	1/2"	1/2"	1/2"	1/2"
Steam working pressure	5 bar	5 bar	5 bar	5 bar
Steam consumption	16 – 20 kg/h	16 – 20 kg/h	16 – 20 kg/h	16 – 20 kg/h
Compressed air inlet	3/8"	3/8"	3/8"	3/8"
Air working pressure	7 bar	7 bar	7 bar	7 bar
Compressed air consumption	10 NL per cycle	-	20 NL per cycle	30 NL per cycle
Central vacuum connection	Ø 48 mm	Ø 48 mm	Ø 48 mm	Ø 48 mm
Central vacuum depression	200 mm H <sub>2</sub> O	200 mm H <sub>2</sub> O	200 mm H <sub>2</sub> O	200 mm H <sub>2</sub> O
Vacuum air consumption	360 m <sup>3</sup> /h	360 m <sup>3</sup> /h	360 m <sup>3</sup> /h	360 m <sup>3</sup> /h
Net weight with boiler	330 kg	380 kg	360 kg	370 kg
Gross weight pallet + special export carton	360 kg	410 kg	390 kg	400 kg
Overall dimensions	1400 x 1150 x 1400 mm	1400 x 1150 x 1400 mm	1400 x 1150 x 1400 mm	1400 x 1150 x 1400 mm
Volume	2.25 m <sup>3</sup>	2.25 m <sup>3</sup>	2.25 m <sup>3</sup>	2.25 m <sup>3</sup>


\*other voltages by request

For manufacturing necessities the above-mentioned specifications are not binding


## Available shapes for:

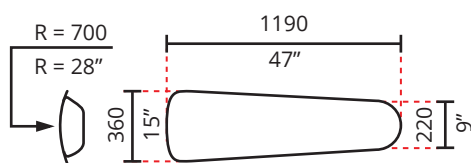


**CPS - CP - BP- SP/U**  
UNIVERSAL BUCK

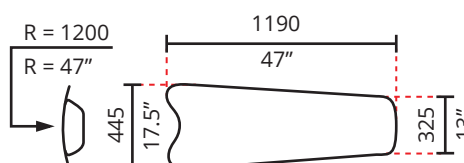

**CPS - CP - SP / P**  
TROUSER BUCK

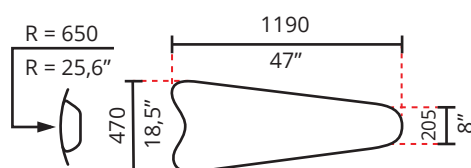

**CPS - CP - SP/UP**  
UNIVERSAL TROUSER BUCK



**BP- SP/B**  
TROUSER TOPPER BUCK

+44 (020) 8579 2661

mail@renzacci.co.uk

www.renzacci.co.uk